Basic Peristaltic Pump

Flow Rates

30000 mL/min

600-22000 mL/min

YT600-1J



Pump Head Options




YZ35-13



KZ35

Mainly used in industrial applications.
With DC motor, can drive multi-pump heads.
Stainless steel housing, high IP rating.

Speed	60rpm-600rpm, CW/CCW.
Control mode	Control panel and external signal control are available
External control	Start/stop, speed control (4-20mA, 1-10V, 1-10kHz external control mode optional).
Dimension (L×W×H)	325×236×193 (mm)
Power supply	AC 220V±20%/400W
Operating temperature	0 to 40℃
Relative humidity	＜80%
IP rating	IP54
Weight	20kg

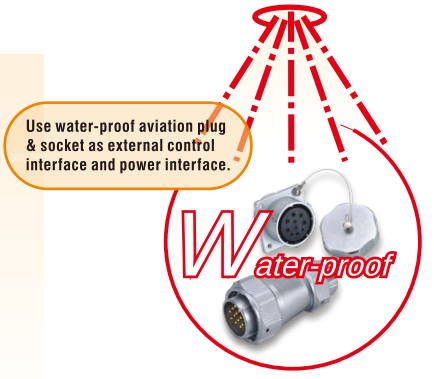

CE INDUSTRIAL Equip with FK-1C to realize dispensing function

Model (Product code,Speed control signal)	Pump Head	Tubing	Flow Rate (mL/min)	Weight (kg)
YT600-1J-A (05.02.52A, 4-20mA) YT600-1J-B (05.02.52B, 1-10V) YT600-1J-C (05.02.52C, 1-10kHz)	(1, 2)×KZ35-13	73# 82#	600-11000 (Single Channel)	21.6-23.2
	(1, 2)×YZ35-13			23.7-27.4

Tel: +86 - 312 - 3110087 Fax: +86 - 312 - 3168553 Internet www.longerpump.com Email:longer@longerpump.com